

Floating Canopy: FCP3(G/S/W/B), FCP2(W/B) -Connect Track to Outlet Box. Power Feed Allowed.

3 Wire

2Wire





Mono Point: MPT3(G/S/W/B), MPT2(W/B) -To Mount a Track Light to an Outlet Box or the fixtures

MPLT3(W/B): For Low Vottage Track Lights



3 Wire





Suspension Loop: SSL(W/B) -Chair Hung Fixtures to Tracks, up to 35 lbs

Suspension Hook: SSK(W/B) -Hung Fixtures to Track up to 30 lbs

3Wire



3 Wire

Outlet Adaptor: OA3(W/B) -Access Track Power with Plugs



Track Adaptor: TAD3(W/B), TAD2(W/B) -Access Track Power by Wiring, 2 or 3 Wire



Pendant Adaptor-PDA 3(W/B) -Adapt pendant lights to track



HZ





3 Wire System




2 Wire System



Wide 2 Wire System

3 Wire Tracks

8 FTR3(G/S/W/B), 6FTR3(G/S/W/B) 4 FTR3(G/S/W/B), 2FTR3(G/S/W/B) Length of 8, 6, 4, 2 feet, Finish of white, Black, Satin and Gold



8 FTR2(W/B), 6FTR2(W/B) 4 FTR2(W/B), 2FTR2(W/B) Length of 8, 6, 4, 2 feet, Finish of white and Black

2 Wire Tracks



Pendant Kit Assembly-PKA-12"/18"/24"/36"/48"(W/B). To Lower the Track Structure, Stem Length of 12, 18, 24, 36, 48 inches. Also, Field Cut the Stem to Accommodate the Length Required, Using Associate Ring To Fix Cut Edge. Color of White or Black.

Associate Ring-ASOR




Slope Pendant Adaptor: SLOPEN(W/B) -For Slope Ceiling, Color White or Black

Wire Way Cover -WWC(W/B) -To Conceal the Wire Feed, Color White or Black

ITEM CODES: PAW-8-W white canopy 8-9 feet cable PAW-8-B Black canopy 8-9 feet cable





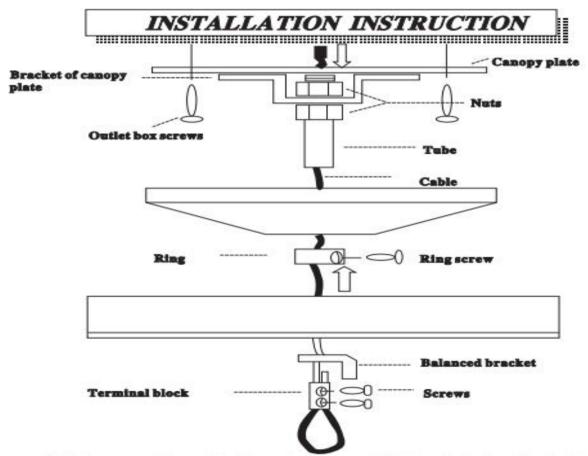

TO SUSPEND TRACK FROM CEILING, ORDER AS FOLLOWS: 2KITS FOR 2' TRACK 2 KITS FOR 4'TRACK; 3KITS FOR 6' TRACK; 3KITS FOR 8' TRACK.

- 1. Fix canopy plate to outlet box by outlet box screws provided.
- 2. Slide the cable into the hole of tube.
- 3. Put bracket of canopy between two nuts of the tube and tighten the nuts by rotating the tube.
- 4. Slide the cable into the canopy and ring.
- 5. Fix the canopy on tube with ring by rotating the screw.
- 6. Cut the cable as your desired length.
- 7. Slide the cable into the track. balanced brakcet and terminal.
- 8. Make a round of cable and slide the end of cable into the terminal.
- 9. Fix the cable tightly by rotating the screws totally.

SAVE THIS INSTRUCTION



60

Floating Canopy: FCP3(G/S/W/B), FCP2(W/B) -Connect Track to Outlet Box. Power Feed Allowed.

3 Wire

2 Wire





Mono Point: MPT3(G/S/W/B), MPT2(W/B) -To Mount a Track Light to an Outlet Box or the fixtures

3 Wire

2Wire





Suspension Loop: ssL(W/B) -Chair Hung Fixtures to Tracks, up fo 35 lbs

Suspension Hook: ssK(W/B) -Hung Fixtures to Track up fo 30 lbs



3 Wire

3Wire



Outlet Adaptor: OA3(W/B) -Access Track Power with Plugs

Track Adaptor: TAD3(W/B), TAD2(W/B) -Access Track Power by Wiring, 2 or 3 Wire








T-Bar Clip:T-clip(W/B) T-Bar End Feeder, 3 wire-TF3(W/B)

Outlet Box Cover: 0BC3(G/S/W/B) osc2(W/B) -To Cover a Standard Outlet Box





n

2 Wire

Slope Adaptor: SLAP3(W/B) Adjustment for Slope Mounted Track Lights

Extention Ward:ERD3 (G/S/W/B)-12"/18"/24"/36"/48" Pull Track Lights Down To Certain Depth

