


Tracks And Accessories

Live End: power cora 15 feet. LE15P3(W/B)
 -Power Feed with 15 feet cable plug



Live End: LE3 CG(G/S/W/B) LE2(W/B)
 -For Power Feed. Direct Wiring

Conduit Live End: LE3 CON(G/S/W/B)
 -For BxCable or Romex

3 Wire

2 Wire

3Wire



Mini | Joint: I J3(G/S/W/B) IJ2(W/B)
 -Straight Joiner for 2 Track Sections

Power | Joint: PIJ3(G/S/W/B)
 -Straight Joiner with Power Feed

3 Wire

2Wire

3Wire



L-Joint: L J3(G/S/W/B) LJ2(W/B)
 -Connect 2 Track Sections to form a 90° Angle

Flexible Joint: FX J3(G/S/W/B)
 FX J2(W/B)
 -Connect 2 Track Sections in Various Corner

3 Wire

2Wire

3Wire

2Wire



T-Joint: T J3(G/S/W/B) TJ2(W/B)
 -Connect 3 Track Sections to form a "r" Structure


X-Joint: X J3(G/S/W/B) X J2(W/B)
 -Connect 4 Track Sections to form a "X" Structure

3Wire

2Wire

3Wire

2 Wire

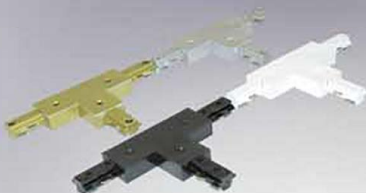

Tracks And Accessories

Floating Canopy: FCP3(G/S/W/B), FCP2(W/B)

-Connect Track to Outlet Box. Power Feed Allowed.

3 Wire



2Wire



Mono Point: MPT3(G/S/W/B), MPT2(W/B)

-To Mount a Track Light to an Outlet Box or the fixtures

3 Wire



2Wire



MPLT3(W/B):

For Low Voltage Track Lights



Suspension Loop: SSL(W/B)

-Chair Hung Fixtures to Tracks, up to 35 lbs

3 Wire



Suspension Hook: SSK(W/B)

-Hung Fixtures to Track up to 30 lbs

3Wire



Outlet Adaptor: OA3(W/B)

-Access Track Power with Plugs





Track Adaptor: TAD3(W/B), TAD2(W/B)

-Access Track Power by Wiring, 2 or 3 Wire



Pendant Adaptor-PDA 3(W/B)


-Adapt pendant lights to track



Tracks And Accessories



3 Wire System




2 Wire System



Wide 2 Wire System

3 Wire Tracks

8 FTR3(G/S/W/B), 6FTR3(G/S/W/B)
 4 FTR3(G/S/W/B), 2FTR3(G/S/W/B)
 Length of 8, 6, 4, 2 feet,
 Finish of white, Black, Satin and Gold

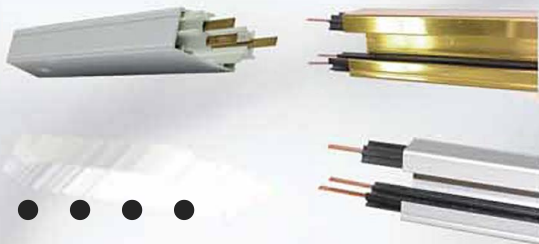

2 Wire Tracks

8 FTR2(W/B), 6FTR2(W/B)
 4 FTR2(W/B), 2FTR2(W/B)
 Length of 8, 6, 4, 2 feet,
 Finish of white and Black



Pendant Kit Assembly-PKA-12"/18"/24"/36"/48"(W/B).
 To Lower the Track Structure, Stem Length of 12, 18, 24, 36, 48 inches.
 Also, Field Cut the Stem to Accommodate the Length Required, Using
 Associate Ring To Fix Cut Edge. Color of White or Black.

Associate Ring-ASOR




Slope Pendant Adaptor:
 SLOPEN(W/B)
 -For Slope Ceiling, Color White or Black

Wire Way Cover

-WWC(W/B)
 -To Conceal the Wire Feed,
 Color White or Black



ITEM CODES: PAW-8-W white canopy 8-9 feet cable
 PAW-8-B Black canopy 8-9 feet cable

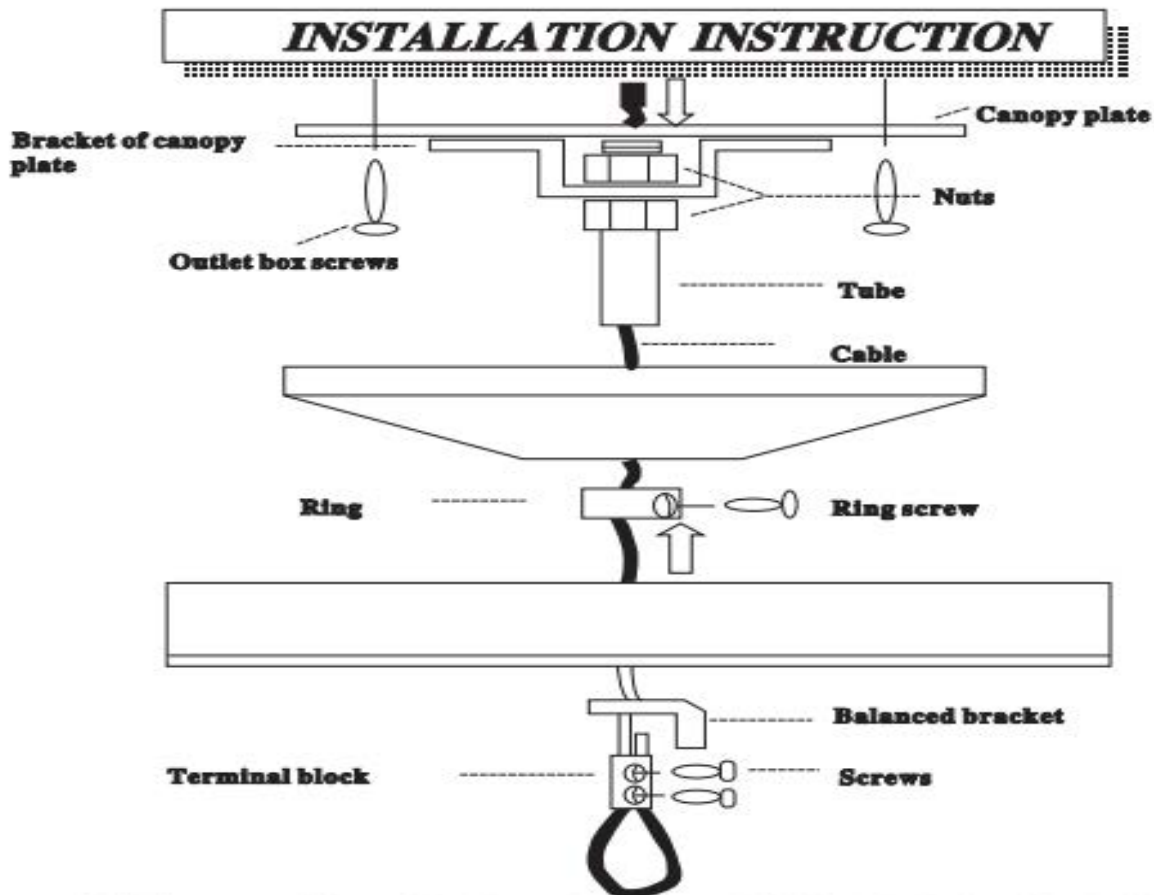

**TO SUSPEND TRACK FROM CEILING, ORDER AS FOLLOWS: 2KITS FOR 2' TRACK
 2 KITS FOR 4' TRACK; 3KITS FOR 6' TRACK; 3KITS FOR 8' TRACK.**

1. Fix canopy plate to outlet box by outlet box screws provided.
2. Slide the cable into the hole of tube.
3. Put bracket of canopy between two nuts of the tube and tighten the nuts by rotating the tube.
4. Slide the cable into the canopy and ring.
5. Fix the canopy on tube with ring by rotating the screw.
6. Cut the cable as your desired length.
7. Slide the cable into the track. balanced brackcet and terminal.
8. Make a round of cable and slide the end of cable into the terminal.
9. Fix the cable tightly by rotating the screws totally.

SAVE THIS INSTRUCTION

Tracks And Accessories

Live End:LE3 CG(G/S/W/8) LE2(W/B)
-For Power Feed. Direct Wiring

Conduit Live End:LE3 CON(G/S/W/B)
-For BxCable or Romex

3Wire

2 Wire

3 Wire



Mini I Joint: IJ3(G/S/W/B) IJ2(W/B)
-Straight Joiner for 2 Track Sections

Power I Joint: PIJ3(G/S/W/B)
-Straight Joiner with Power Feed

3Wire

2 Wire

3 Wire



L-Joint: LJ3(G/S/W/B) LJ2(W/B)
-Connect 2 Track Sections to form a 90° Angle

Flexible Joint: FX J3(G/S/W/B)
FX J2(W/B)
-Connect 2 Track Sections in Various Corner

3Wire

2 Wire

3 Wire

2Wire



T-Joint: TJ3(G/S/W/B) TJ2(W/B)
-Connect 3 Track Sections to form a "T" Structure

X-Joint: XJ3(G/S/W/B) XJ2(W/B)
-Connect 4 Track Sections to form a "X" Structure

3Wire

2Wire

3Wire

2Wire



Tracks And Accessories

Floating Canopy: FCP3(G/S/W/B), FCP2(W/B)

-Connect Track to Outlet Box. Power Feed Allowed.

3 Wire



2 Wire



Mono Point: MPT3(G/S/W/B), MPT2(W/B)

-To Mount a Track Light to an Outlet Box or the fixtures

3 Wire



2Wire



Suspension Loop: ssL(W/B)

-Chair Hung Fixtures to Tracks, up fo 35 lbs

3 Wire



Suspension Hook: ssK(W/B)

-Hung Fixtures to Track up fo 30 lbs

3Wire



Outlet Adaptor: OA3(W/B)

-Access Track Power with Plugs



Track Adaptor: TAD3(W/B), TAD2(W/B)

-Access Track Power by Wiring, 2 or 3 Wire



Tracks And Accessories




T-Bar Clip: T-clip(W/B)

T-Bar End Feeder, 3 wire-TF3(W/B)

Outlet Box Cover: 0BC3(G/S/W/B) osc2(W/B)

-To Cover a Standard Outlet Box



Slope Adaptor: SLAP3(W/B)

Adjustment for Slope Mounted Track Lights

Extention Ward: ERD3

(G/S/W/B)-12"/18"/24"/36"/48"

Pull Track Lights Down To Certain Depth



Track side by side binding : TSSB(W/B)

Length - 15.5", Color - White or Black



Track 90° binding, L shape : T90B(W/B)

Eack arm - 10.5", Color - White or Black

